

60.00 mm


115.00 mm

nordlux®
FOLD 10
 Dessin:2019041031
 Db:2085840
 Galvaniseret
 Verzinkt
 Galvanizet
 Galvaniserad
 Galvanise
 Gegalvaniseerd



nordlux®

FOLD 10
 Dessin:2019041031
 Db:2085840
 Galvaniseret
 Verzinkt
 Galvanizet
 Galvaniserad
 Galvanise
 Gegalvaniseerd



1 LIGHT EFFECTS INCLUDED

95%⁰ warm up < 2 sec
 Light up: < 0.5 sec

120°
 30000 HOURS

PLEASE NOTE
 LED MODULE IS
 FIXED IN LAMP

2x225
 LUMEN

3000
 KELVIN
 LED
 2x3.5W

15000
 ON/OFF

Hg
 Ra >80

www.nordlux.com
 Nordlux A/S · Østre Havnegade 34 · DK-9000 Aalborg

5 704924 000553

IP54
CE
230V
M/P
15000 ON/OFF



Klasse 1 (grd)
 Contact
 Jordkontakt (1)
 Prise de terre (classe 1)
 Græsklasse 1)

Metall/Fest
 Metall/Komposert
 Metall/Plastic material
 Metall/Fest
 Metall/Plastic
 Metall/plastic material

Egnet til udendørs brug
 Geeignet für Außen
 Suitable for outdoor
 Lämping for utemiljøbruk
 Indikat for usage extérieur
 Geschikt voor buiten

Parallelfunktionee muligt
 Parallelfunktion möglich
 Parallel arrangement possible
 Montage en parallèle possible
 Parallel aansluiting mogelijk

! Danmark skal udendørs lamper monteres af en autoriseret elinstallatør.
 In Denmark, outdoor lightings must be mounted by an authorized electrician.
 In Danmark muss Außenleuchten von einem autorisierten Elektroinstallateur montiert werden.
 ! Danmark skal utemiljølamper monteres av en autoriseret elinstallatør.
 Au Danemark les lampes pour usage extérieur doivent être montées par un installateur-électricien autorisé.

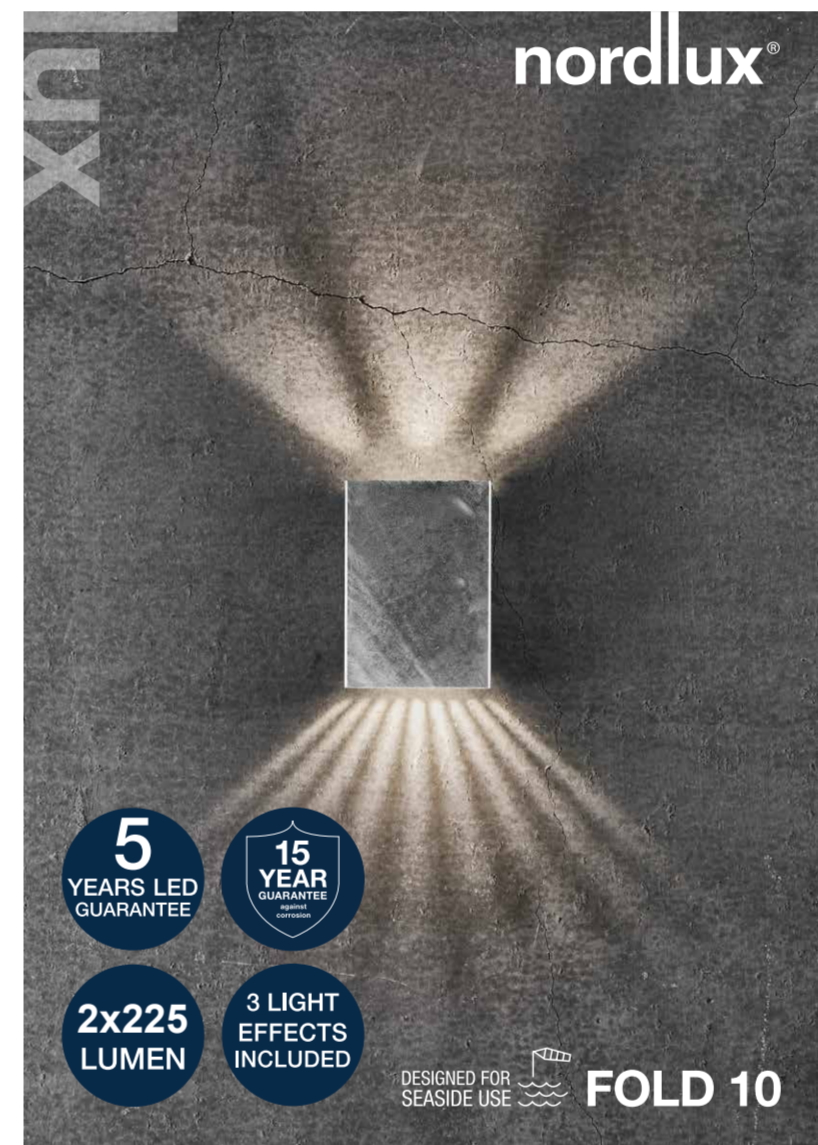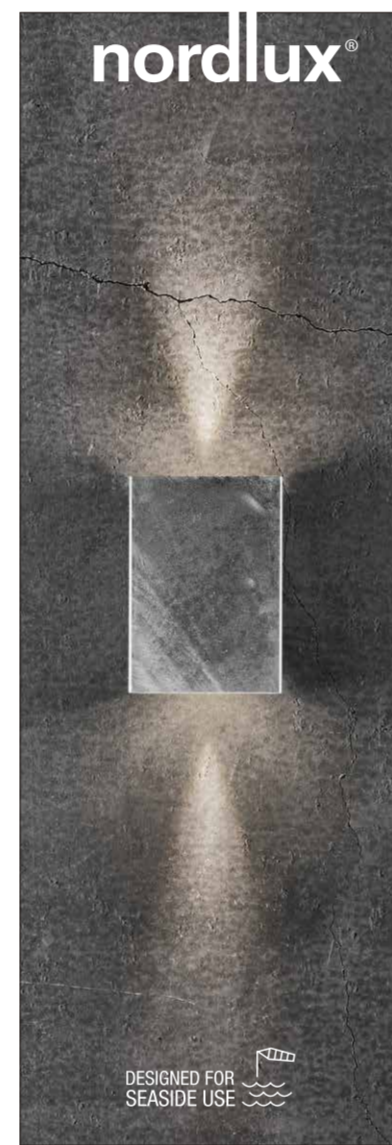

160.00 mm

AAD:24042020 XY