

nordlux®

STAKE

Item N°: 2110360101
 Db: 2160502
 Hvid/Weiss/White
 Vit/Blanc/Wit



Må ikke tildekkes med termisk isolermateriale
 Nicht geeignet zum Abdecken mit wärmeisoliertem Material
 Not suitable for covering with thermally insulated material
 Ikke egnet til å dekke med termisk isolert materiale
 Ne convient pas au revêtement avec matériau d'isolation thermique
 Niet geschikt om rechtstreeks in isolatiemateriaal te monteren

Hølediameter 72-76mm
 Einbaudiameter 72-76mm
 Hole diameter 72-76mm
 Håldiameter 72-76mm
 Diamètre de perçage 72-76mm
 Inbouw (zaag)doormeter 72-76mm





Parallellforbindelse muligt
 Parallelschaltung möglich
 Parallel arranging possible
 Möjligt att parallellkoppla
 Montage en parallèle possible
 Parallele doorverbinding mogelijk

www.nordlux.com

Nordlux A/S - Østre Havnegade 34 - DK-9000 Aalborg



Max. number of interconnections : 15pcs

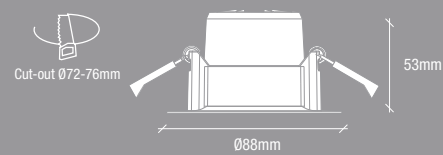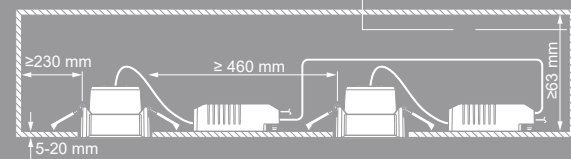

Lumen	450lm
Dimmability	Dimmable
Wattage	6,1W LED
Light source	Fixed LED Module
CCT	2700K Warm white
IP class	IP20
Lifetime	20 000 hours
Voltage	220-240V ~ 50Hz
Class	Class II
Beam angle	36°
CRI	80
Mercury/Hg	0mg
Material	Plastic / Metal


AAD: 25092021 YK

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
13x13x6.5 CM	0.042 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.2366 KG	0.0011 CBM

nordlux®



Nordlux
 2110360101



7 kWh/1000h



2019/2015



STAKE

2700K WARM WHITE



nordlux®
1-KIT




STAKE

2700K WARM WHITE



nordlux®

nordlux®

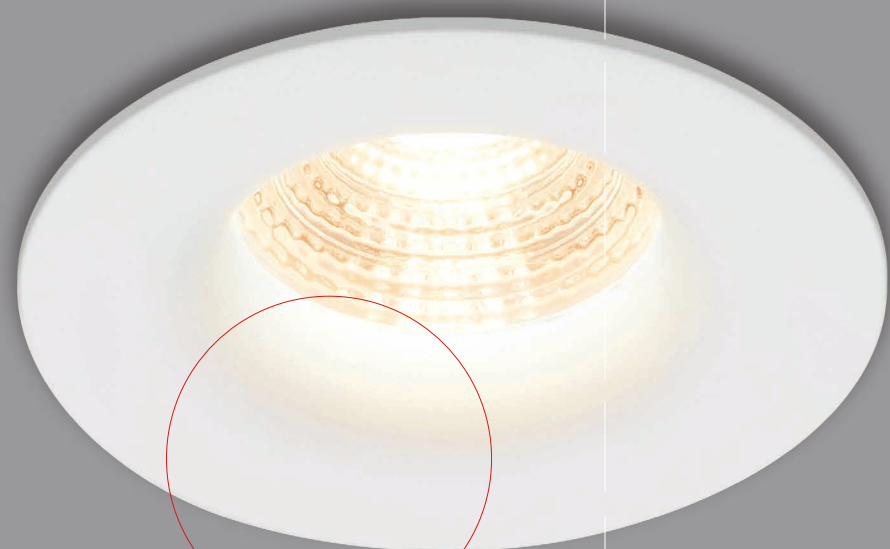

1-KIT

Nordlux UK
 Unit 22, Deanfield Court
 BB7 1QS Clitheroe Lancashire
 01200422777