

239 mm


130 mm

28

LEONIS IP65

Item N°: 2310016055
Db: 2319285
Børstet Nikkel/Gebürsteter Nickel
Brushed Nickel/Borstad Nickel
Nickel Brossé/Geborsteld Nikkel

Max. number of interconnections : 15pcs

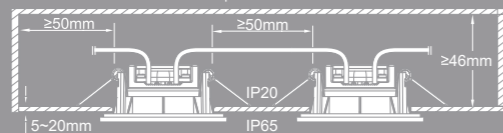

Lumen	345lm
Dimmability	Non-dimmable
Wattage	4,5W LED
Light source	Fixed LED Module
CCT	2700K Warm white
IP class	IP65
Lifetime	20 000 hours
Voltage	220-240V - 50Hz
Class	Class II
Beam angle	110°
CRI	80
Mercury/Hg	0mg
Material	Plastic

www.nordlux.com
Nordlux A/S - Østre Havnegade 34 - DK-9000 Aalborg



ENERGY
Nordlux
2310016055

5 kWh/1000h

2019/06/10
5102/0101

ENERGY
Nordlux
2310016055

5 kWh/1000h



2021 No. 1095

AAD: 06122023 YK

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
13x13x5 CM	0.04 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.122 KG	0.0008 CBM

nordlux®

nordlux®

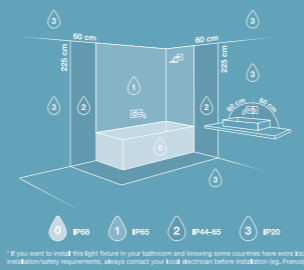

Må ikke tildekkes med termisk isolermateriale
Nicht geeignet zum Abdecken mit wärmeisoliertem Material
Not suitable for covering with thermally insulated material
Ne convient à être recouvert avec matériau d'isolation thermique
Niet geschikt om rechtstreeks in isolatiemateriaal te monteren

Parallelforbindelse muligt
Parallelanschaltung möglich
Parallel arranging possible
Mogelijk tot parallelkoppeling
Montage en parallel is mogelijk
Parallelle doorverbinding mogelijk

LEONIS IP65

2700K WARM WHITE

345 LUMEN
360°
4,5W

5 YEAR LED GUARANTEE

BATHROOM SAFE

PARALLEL CONNECTION

LEONIS IP65

2700K WARM WHITE

G

345 LUMEN
360°
4,5W

5 YEAR LED GUARANTEE


BATHROOM SAFE

PARALLEL CONNECTION

nordlux® 1-KIT



nordlux® nordlux®

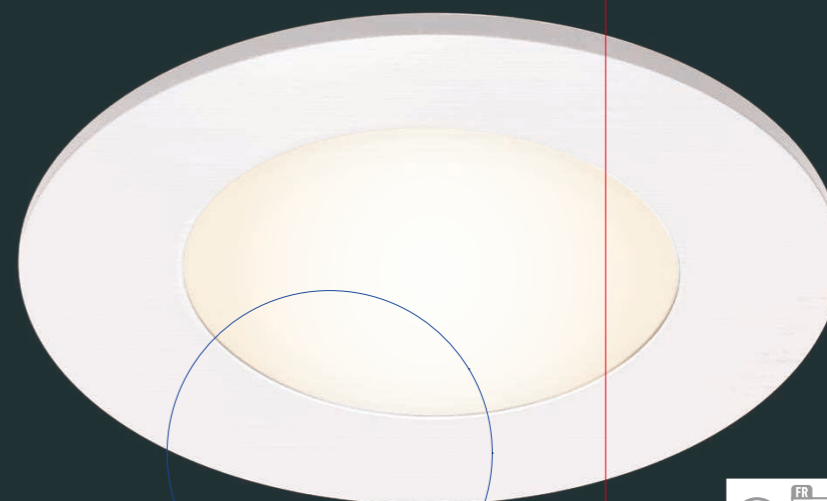

1-KIT



Points de collecte sur www.quefairede mesdechets.fr
Privilégiez la réparation ou le don de votre appareil!

Højdiameter 68-74mm
Einbaudiameter 68-74mm
Høje diameter 68-74mm
Håldiameter 68-74mm
Diámetro de perforación 68-74mm
Inbouw (zaag)doormeter 68-74mm

Nordlux UK
Unit 22, Deanfield Court
BB7 1QS Clitheroe Lancashire
01200422777

130 mm

50 mm

373.458 mm