



### FREMONT IP65

Item N°: 2310046032 Børstet Stål/ Gebürsteter Stahl  
 Db: 2319306 Brushed Steel/Borstat Stål  
 Acier Brossé/Geborsteld Staal

Max. number of interconnections : 15pcs

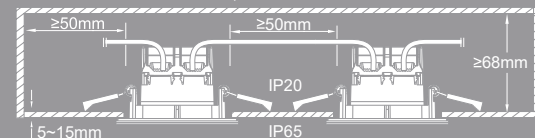

Cut-out Ø72mm

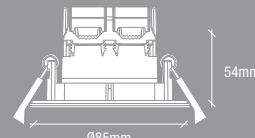

Lumen	380lm
Dimmability	Dimmable
Wattage	4,5W LED
Light source	Fixed LED Module
CCT	4000K Cool white
IP class	IP65
Lifetime	25 000 hours
Voltage	220-240V~ 50Hz
Class	Class II
Beam angle	36°
CRI	80
Mercury/Hg	0mg
Material	Plastic/Metal

www.nordlux.com

Nordlux A/S - Østre Havnegade 34 - DK-3000 Aalborg



**ENERGY LABEL**

**Nordlux**  
2310046032

Energy efficiency class: **F**

5 kWh/1000h

2021 No. 1095

**ENERGY LABEL**


**Nordlux**  
2310046032

Energy efficiency class: **F**


5 kWh/1000h

2021 No. 1095


## nordlux®

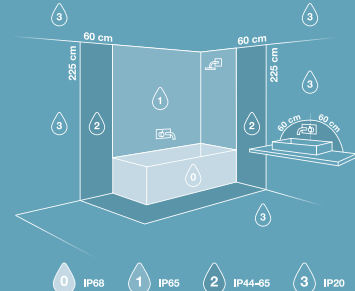

\* If you want to install this light fixture in your bathroom and knowing some countries have extra local installation safety requirements, always contact your local electrician before installation (eg. France).



Må ikke tildekkes med termisk isolermateriale  
 Nicht geeignet zum Abdecken mit wärmeisoliertem Material  
 Not suitable for covering with thermally insulated material  
 Ikke egnet til å dekke med termisk isolert materiale  
 Ne convient pas au revêtement avec matériau d'isolation thermique  
 Niet geschikt om rechtstreeks in isolatiemateriaal te monteren

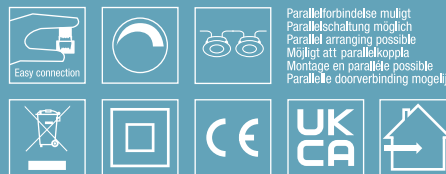

Parallelforbindelse muligt  
 Parallelschaltung möglich  
 Parallel arrangement possible  
 Möglich alt parallelkoble  
 Montage en parallèle possible  
 Parallele doorverbinding mogelijk

AAD: 20012026 YK

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
13x13x7 CM	0.0444 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.156 KG	0.0012 CBM

### FREMONT IP65

4000K COOL WHITE

380 LUMEN  
90°  
4,5W



DIMMABLE



PARALLEL CONNECTION



BATHROOM SAFE



BEAM ANGLE 36°

## nordlux® 1-KIT



### FREMONT IP65

4000K COOL WHITE



380 LUMEN  
90°  
4,5W



DIMMABLE



PARALLEL CONNECTION




BATHROOM SAFE



BEAM ANGLE 36°

## nordlux®

## nordlux®

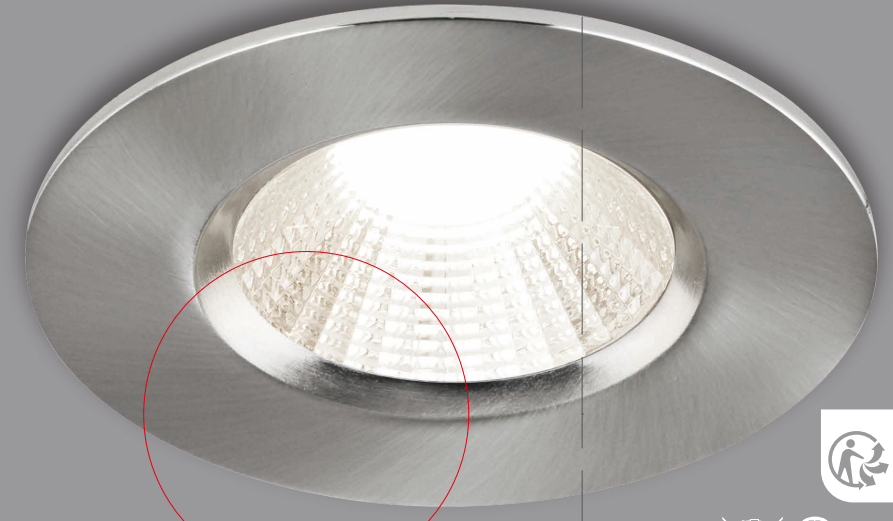

## 1-KIT



FR ÉLÉMENTS D'EMBALLAGE



Cet appareil se recycle



À DÉPOSER EN MAGASIN À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairemesdechets.fr

Privilégiez la réparation ou le don de votre appareil !

Hulldiameter 72mm  
 Einbaudiameter 72mm  
 Hole diameter 72mm  
 Håldiameter 72mm  
 Diamètre de perçage 72mm  
 Inbouw (zaag)doormeter 72mm

Nordlux UK  
 Unit 22, Deanfield Court  
 BB7 1QS Clitheroe Lancashire  
 01200422777