


nordlux®

nordlux®

FREMONT IP23

nordlux®
3-KIT

4000K COOL WHITE



FREMONT IP23


nordlux®

FREMONT IP23


nordlux®

4000K COOL WHITE


Max. number of interconnections : 15pcs

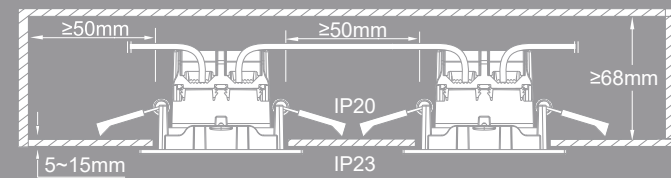

Cut-out Ø72mm

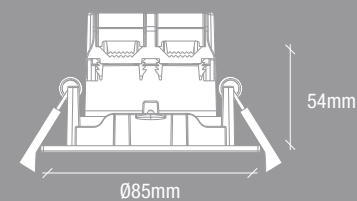


Nordlux
47870132



5 kWh/1000h



Nordlux
47870132



5 kWh/1000h

FREMONT IP23

Item N°: 47870132
Db: 1984853
Borstet Stål/ Gebürsteter Stahl
Brushed Steel/Borstat Stål
Acier Brossé/Geborsteld Staal

Lumen	380lm
Dimmability	Dimmable
Wattage	4,5W LED
Light source	Fixed LED Module
CCT	4000K Cool white
IP class	IP23
Lifetime	25 000 hours
Angle of tilt	12°
Voltage	220-240V- 50Hz
Class	Class II
Beam angle	36°
CRI	80
Mercury/Hg	0mg
Material	Plastic/Metal


www.nordlux.com

Nordlux A.S. - Bane Havnsgade 34 - DK-00000 København



AAD: 30092022 YK

Height - Width - Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
26.85x10.8x6.8 CM	0.0668 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.449 KG	0.0020 CBM





Nicht geeignet zum Abdecken mit wärmeisolierendem Material
Not suitable for covering with thermally insulated material
Ne convient à la dévise avec matériau isolant thermique
Niet geschikt om rechtstreeks in isolatiemateriaal te monteren

Parallelsambinding mogelijk
Parallelanbindung möglich
Mogligt att parallellkoppla
Mögliche en parallell förbindelse
Parallell förbindelse mogelijk

Körningsgrad: 12°
Schwenkwinkel: 12°
Angle of tilt: 12°
Lampans vinklingsgrad: 12°
Drejs vinkel: 12°
Kartelbaar: 12°

Hölsdiameter: 72mm
Expansionsdiameter: 72mm
Höls diameter: 72mm
Hölsdiameter: 72mm
Innove: (Lampdiameter): 72mm

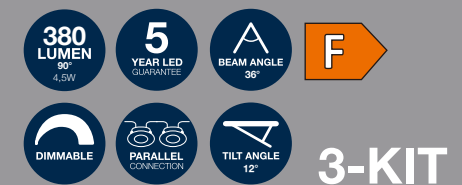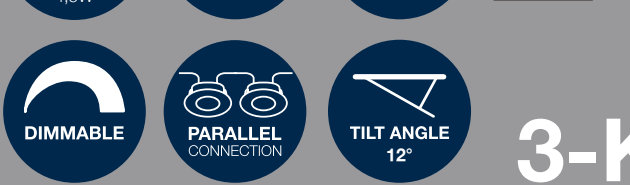

Nordlux UK
Unit 22, Deanfield Court
BB7 1QS Clitheroe Lancashire
01200422777

66,5

268,5

54,5

267

404,8

108

68

108

66,5

365,5