



# LEONIS 3-KIT IP65 | DOWNLIGHT/RECESSED | WHITE

49180101

**nordlux®**

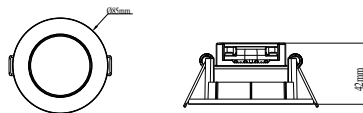

Cutout: 68-76mm

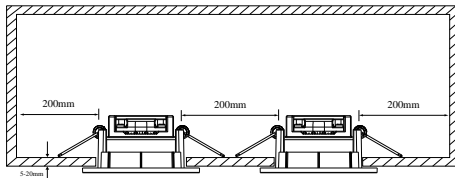

Voltage (V): 230 Volt

IP degree if the fixture includes

two types of IP degree: IP65

Class (Class I, Class II, Class III):

Class 2 (Double isolated)

Lampholder type (eg, E27/E14,

etc): LED Module

Dimmerable: True

Parallel connection possible?:

True

Primary material: Plastic

Color: White

Built In Spot Diameter (cm): 8.5

EAN: 5701581466784

TUN: 2049721

Item Number: 49180101

Pcs Per Master Carton: 3

Sales Box Height (cm): 13

Sales Box Width(cm): 13

Sales Box Depth (cm): 14

Sales Box Volume m³ : 0.0024

Net weight of the luminaire (kg):

0.383

Useful Lumen (lm): 345

Color Temperature (K): 2700

Ra-value : 80

Lifetime (h): 20000

Spread Angle (°) (beam angle of luminaire): 110

Candela (cd) (for directional lamp only): 0

- Parallel connection possible
- Ideally suited for bathroom zone 1-2 IP65
- Integrated connector block
- Parallel connection possible

Leonis is a single downlight with a low installation height. The downlight has an integrated LED and a frame in white plastic which contributes to a long life and low energy consumption. Furthermore, the downlight has opal white diffuser glass, that allows light to spread beautifully throughout the room. It is quick and easy to install Leonis via a screwless plug-in connection and twist-lock system. In addition, the downlight has a flexible cutting diameter (Ø68-73/76mm) and allows for parallel connection.

The downlight emits a warm light of 2700 K, which makes it particularly suitable in the living room, the dining room or the bedroom.