

ENERGY
Nordlux
 49200155

A
B
C
D
E
F
G

5 kWh/1000h

ENERGY
Nordlux
 49200155

A
B
C
D
E
F
G


5 kWh/1000h

LEONIS IP65
 Item N°: 49200155
 Db : 2319318
 Barstet Nikkel/Gebürsteter Nickel
 Brushed Nickel/Borstad Nickel
 Nickel Brossé/Geborsteld Nikkel

Lumen	400lm
Dimmability	Non-dimmable
Wattage	4,5W LED
Light source	Fixed LED Module
CCT	4000K Cool white
IP class	IP65
Lifetime	20 000 hours
Voltage	220-240V ~ 50Hz
Class	Class II
Beam angle	110°
CRI	80
Mercury/Hg	0mg
Material	Plastic

www.nordlux.com
 Nordlux AS - Bølle Hemsgade 34 - DK-9000 Aalborg

5 701581 467385

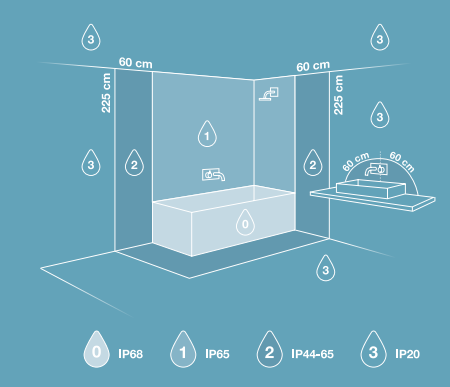

Må ikke tildekkes med termisk isolermateriale
 Nicht gegenw. dem Abdecken mit wärmeisolierendem Material
 Not suitable for covering with thermally insulated material
 Ikke egnet til å dekke med termisk isolert materiale
 Ne convient pas au revêtement avec matériaux d'isolation thermique
 Niet geschikt om rechtstreeks in isolatiemateriaal te monteren

Parallelforbindelse muligt
 Parallelanschaltung möglich
 Möglich att parallelkopplas
 Montages in parallelle possible
 Parallelle doovertbinding mogelijk

Højdiameter 68-74mm
 Einbaudiameter 68-74mm
 Højdiameter 68-74mm
 Højdiameter 68-74mm
 Diameter de perçage 68-74mm
 Brouw (zaag)doormeter 68-74mm

400 LUMEN
360°
4,5W

5 YEAR LED GUARANTEE

IP65 BATHROOM SAFE

PARALLEL CONNECTION

F

3-KIT

400 LUMEN
360°
4,5W

5 YEAR LED GUARANTEE

IP65 BATHROOM SAFE

PARALLEL CONNECTION

F

3-KIT

AAD: 17072023 YK

Height + Width + Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
26.85x10.8x6.8 CM	0.0668 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.319 KG	0.0020 CBM

Nordlux UK
 Unit 22, Deanfield Court
 BB7 1QS Clitheroe Lancashire
 01200422777

108 68 108 66,5 365,5

54,5 268,5 267 404,8 66,5