


LEONIS 3-KIT 4000K | DOWNLIGHT | BRUSHED NICKEL

nordlux®

49200155

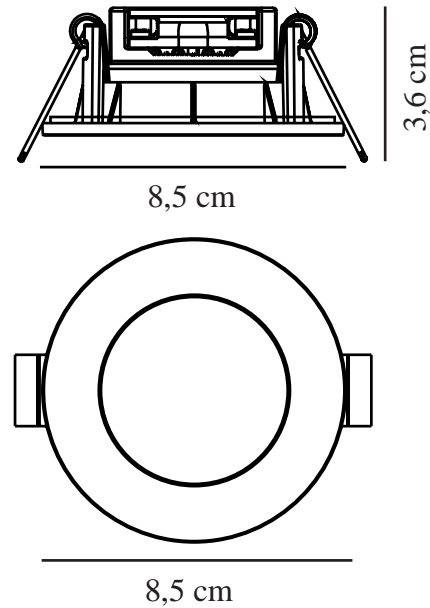

Voltage (V): 220-240 Volt
IP degree: IP65
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Socket type: LED Module
Dimmerable: False
Parallel connection: True

Primary material: Plastic
Secondary material: Plastic
Colour: Brushed Nickel

Height (cm): 3.6
Built In Spot Diameter (cm): 8.5
Mount directly into insulation:
False

EAN: 5701581467385
Item Number: 49200155
Pcs Per Master Carton: 3

Sales Box Height (cm): 26.85
Sales Box Width (cm): 10.8
Sales Box Depth (cm): 6.8
Sales Box Volume m³: 0.002
Product net weight (kg): 0.2298

Brightness of light (Lumen): 400
Colour temperature (Kelvin): 4000
Ra-value : 80
Lifetime (hours): 20000
Beam angle (°) : 360
Candela (cd) (for directional
lamp only): 0
Energy class: F
Actual watt (W): 4.5

- Suitable for the bathroom (IP65) • Easy installation
- Parallel connection possible • 5-year LED guarantee

Leonis is a simple downlight with a low installation height. With integrated LED, a plastic frame and a warm, white light (4000 kelvin).

Leonis is quick and easy to install, has a flexible cutting diameter (68–73/76mm) and allows for parallel connection.

The high protection rating (IP65) means Leonis is particularly suitable for the bathroom.

ENERG

Nordlux
49200155

A
B
C
D
E
F
G

F

5
kWh/1000h

2019/2015