


# LEONIS 3-KIT 4000K | DOWNLIGHT | BRUSHED NICKEL

nordlux®

49200155

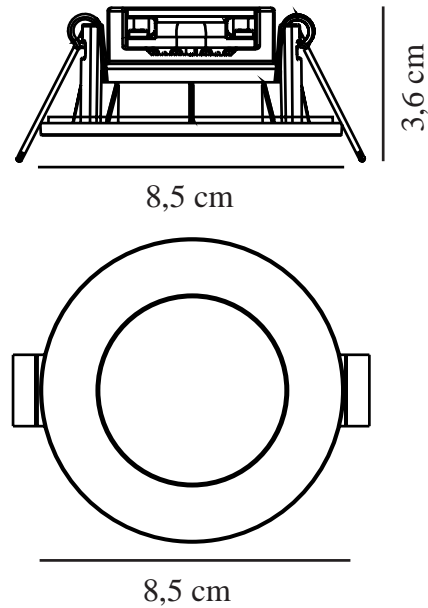

Voltage (V): 220-240 Volt  
IP degree: IP65  
Class (Class 1, Class 2, Class 3):  
Class 2 (Double isolated)  
Socket type: LED – Non-replaceable light source  
Dimmerable: False  
Parallel connection: True

Primary material: Plastic  
Secondary material: Plastic  
Colour: Brushed nickel

Height (cm) : 3.6  
Built In Spot Diameter (cm): 8.5  
Mount directly into insulation:  
False  
EAN: 5701581467385  
Item Number: 49200155

Pcs Per Master Carton: 3  
Sales Box Height (cm): 26.85  
Sales Box Width(cm): 10.8  
Sales Box Depth (cm): 6.8  
Sales Box Volume m<sup>3</sup> : 0.002  
Product net weight (kg): 0.2298

Brightness of light (Lumen): 400  
Colour temperature (Kelvin): 4000  
Ra-value : 80  
Lifetime (hours): 20000  
Beam angle (°) : 360  
Candela (cd) (for directional lamp only): 0  
Energy class: F  
Actual watt (W): 4.5


- Suitable for the bathroom (IP65) • Easy installation
- Parallel connection possible • Long LED lifespan (20,000 hours)

Leonis is a simple downlight with a low installation height. With integrated LED, a plastic frame and a warm, white light (4000 kelvin).

Leonis is quick and easy to install, has a flexible cutting diameter (68–73/76mm) and allows for parallel connection.

The high protection rating (IP65) means Leonis is particularly suitable for the bathroom.

[www.nordlux.com](http://www.nordlux.com)

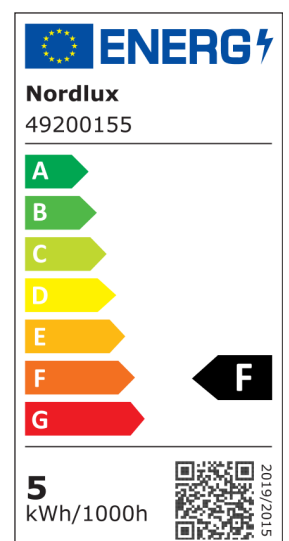

5  
kWh/1000h

