


nordlux®

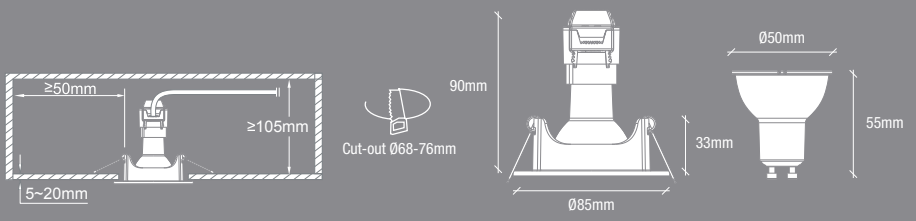

Lumen	380lm
Dimmability	Non-dimmable
Wattage	4,8W LED
Light source	Incl. LED GU10
IP class	IP20
CCT	4000K Cool white
Lifetime	15 000 hours
On/Off	50 000x
Angle of tilt	27°
Voltage	220-240V AC 50/60Hz
Class	Class II
Beam angle	36°
Warm up time	Instant
CRI	≥80
Mercury/Hg	0mg
Material	Plastic

OCTANS

Dessin: 49270155
Borstet nikkel/Gebürsteter Nickel
Brushed nickel/Borstat nickel
Nickel brossé



www.nordlux.com
Nordlux A/S · Østre Havnegade 34 · DK-9000 Aalborg



nordlux®

nordlux® 49270155

This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

This luminaire is sold with a bulb of the energy class: A++

874/2012

DO NOT BUILD DIRECTLY INTO INSULATION

OCTANS

4000K COOL WHITE



3x380LM LED

Incl. 3x4,8W LED GU10 | 220-240V
BRUSHED NICKEL | IP20

OCTANS

4000K COOL WHITE



3x380LM LED

Incl. 3x4,8W LED GU10 | 220-240V
BRUSHED NICKEL | IP20

nordlux®



Kipningsgrad: 27°
Schwenkbar bis: 27°
Angle of tilt: 27°
Lampans vridningsgrad: 27°
Degré de déversement: 27°



Hulldiameter 68-76mm
Einbaudiameter 68-76mm
Hole diameter 68-76mm
Håldiameter 68-76mm
Diamètre de perçage 68-76mm

AAD: 05062019 YK

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
13x13x9 CM	0.055 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.343 KG	0.00152 CBM