

nordlux 49420155

This luminaire contains built-in LED lamps.

A+
A+
A
C
D
E

LED

The lamps cannot be changed in the luminaire.

874/2012

DO NOT BUILD DIRECTLY INTO INSULATION

AAD: 14032019 YK

| | |
|---------------------------------------|---------------------------|
| Height x Width x Depth COLOR BOX (CM) | NET WEIGHT COLOR BOX (KG) |
| 13x13x16 CM | 0.090 KG |
| GROSS WEIGHT COLOR BOX (KG) | VOLUME COLOR BOX (CBM) |
| 0.498 KG | 0.00270 CBM |

DORADO
5 YEAR LED GUARANTEE
2700K WARM WHITE

nordlux

3x345LM LED
3x5,5W LED MODULE | 220-240V
DIMMABLE | BRUSHED NICKEL | IP20


DORADO
5 YEAR LED GUARANTEE
2700K WARM WHITE

nordlux

3x345LM LED
3x5,5W LED MODULE | 220-240V
DIMMABLE | BRUSHED NICKEL | IP20

nordlux

nordlux

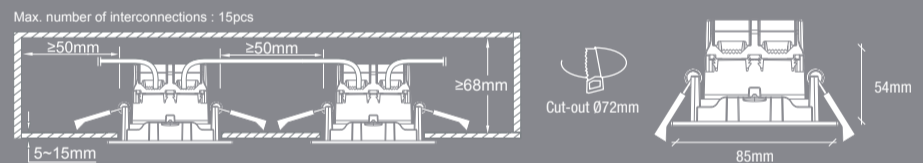

| | |
|---------------|------------------|
| Lumen | 345lm |
| Dimmability | Dimmable |
| Wattage | 5,5W LED |
| Light source | Fixed LED Module |
| CCT | 2700K Warm white |
| IP class | IP20 |
| Lifetime | 20 000 hours |
| On/Off | 20 000x |
| Angle of tilt | 12° |
| Voltage | 220-240V AC 50Hz |
| Class | Class II |
| Beam angle | 36° |
| Warm up time | Instant |
| CRI | 80 |
| Mercury/Hg | 0mg |
| Material | Plastic/Metal |

DORADO
Dessin: 49420155
Db: 2049761
Borstet nikkel/Gebürsteter Nickel
Brushed nickel/Borstet nickel
Nickel brossé

www.nordlux.com
Nordlux A.S. - Østre Havnegade 34 - DK-9000 Århus

5 701581 471481

Easy connection

Kipningsgrad: 12°
Svænkelbar bue: 12°
Angle of tilt: 12°
Lampans vridningsgrad: 12°
Degre de deversement: 12°

Håklämmer 72mm
Ersättningsdiameter 72mm
Håkl. diameter 72mm
Håklämmer 72mm
Diameter de perçage 72mm

Parallelskikning muligt
Parallelarrangement möglich
Möglichkeit parallelkopplung
Montage en parallèle possible

12°

36°

Indoor