


nordlux®

nordlux®

nordlux®

nordlux®

Max. number of interconnections : 15pcs

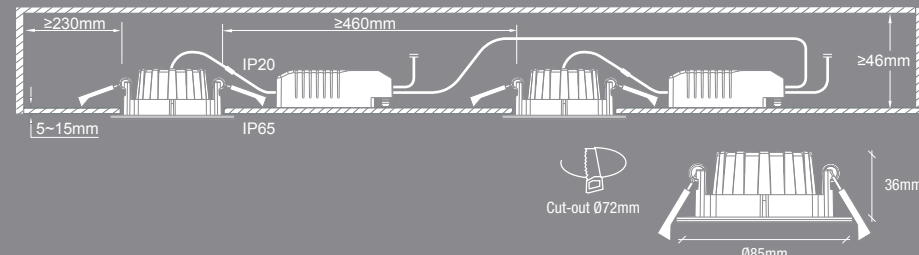


Lumen	345lm
Dimmability	Dimmable
Wattage	5,5W LED
Light source	Fixed LED Module
CCT	4000K Cool white
IP class	IP65
Lifetime	20 000 hours
On/Off	20 000x
Voltage	Driver 220-240V AC 50Hz / Spot 27V
Class	Driver Class II / Spot Class III
Beam angle	100°
Warm up time	Instant
CRI	≥80
Mercury/Hg	0mg
Material	Plastic / Metal

DORADO IP65

Item N°: 49450155
Børstet nikkel/Gebürsteter Nickel
Brushed nickel/Borstat nickel
Nickel brossé/Geborsteld staal

www.nordlux.com
Nordlux A/S · Østre Havnegade 34 · DK-9000 Aalborg



DO NOT BUILD DIRECTLY INTO INSULATION

DORADO IP65

5 YEAR LED GUARANTEE
4000K COOL WHITE

3-KIT

3x345LM LED
3x5,5W LED MODULE | 220-240V
DIMMABLE | BRUSHED NICKEL | IP65

DORADO IP65

5 YEAR LED GUARANTEE
4000K COOL WHITE


3-KIT

3x345LM LED
3x5,5W LED MODULE | 220-240V
DIMMABLE | BRUSHED NICKEL | IP65



Hulldiameter 72mm
Eindiameter 72mm
Hølediameter 72mm
Hulldiameter 72mm
Diamètre de perçage 72mm
Inbouw (æsg) diameter 72mm

Parallelforbindelse muligt
Parallelstilling möglich
Parallel arrangement possible
Montage en parallèle possible
Parallelforbindelse mogelijk

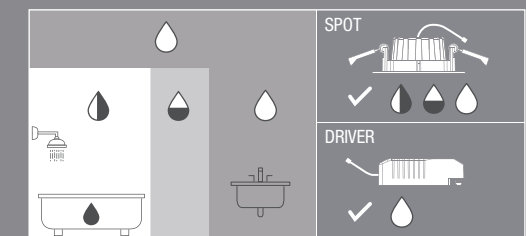

AAD: 15062020 YK

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
13x13x11.5 CM	0.070 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.567 KG	0.00194 CBM