



nordlux®

Max. number of interconnections : 15pcs

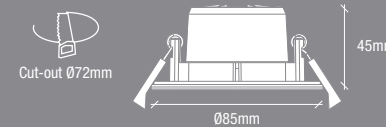

Lumen	345lm/600lm
Dimmability	Non-dimmable
Wattage	5.7W/8.6W LED
Light source	Fixed LED Module
CCT	2700K Warm white 4000K Cool white
IP class	IP65
Lifetime	20 000 hours
On/Off	15 000x
Voltage	220-240V AC 50Hz
Class	Class II
Beam angle	100°
Warm up time	Instant
CRI	80
Mercury/Hg	0mg
Material	Plastic/Metal

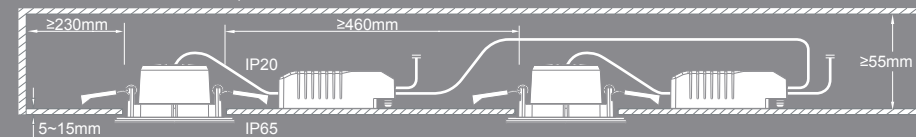

www.nordlux.com

Nordlux A/S - Østre Havnegade 34 - DK-9000 Aalborg




AAD: 07032019 YK

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
13x13x6.5 CM	0.042 KG
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.212 KG	0.00110 CBM

nordlux®

nordlux® 49570155

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012

DO NOT BUILD DIRECTLY INTO INSULATION



TIAKI

MOODMAKER®



345LM WARM WHITE | 600LM COOL WHITE

WORKS WITH A NORMAL SWITCH

1x345/600LM LED

1x5.7W/8.6W LED MODULE | 220-240V
BRUSHED NICKEL | IP65

nordlux®



TIAKI

5 YEAR LED GUARANTEE

MOODMAKER®




345LM WARM WHITE | 600LM COOL WHITE

WORKS WITH A NORMAL SWITCH

1x345/600LM LED

1x5.7W/8.6W LED MODULE | 220-240V
BRUSHED NICKEL | IP65

nordlux®

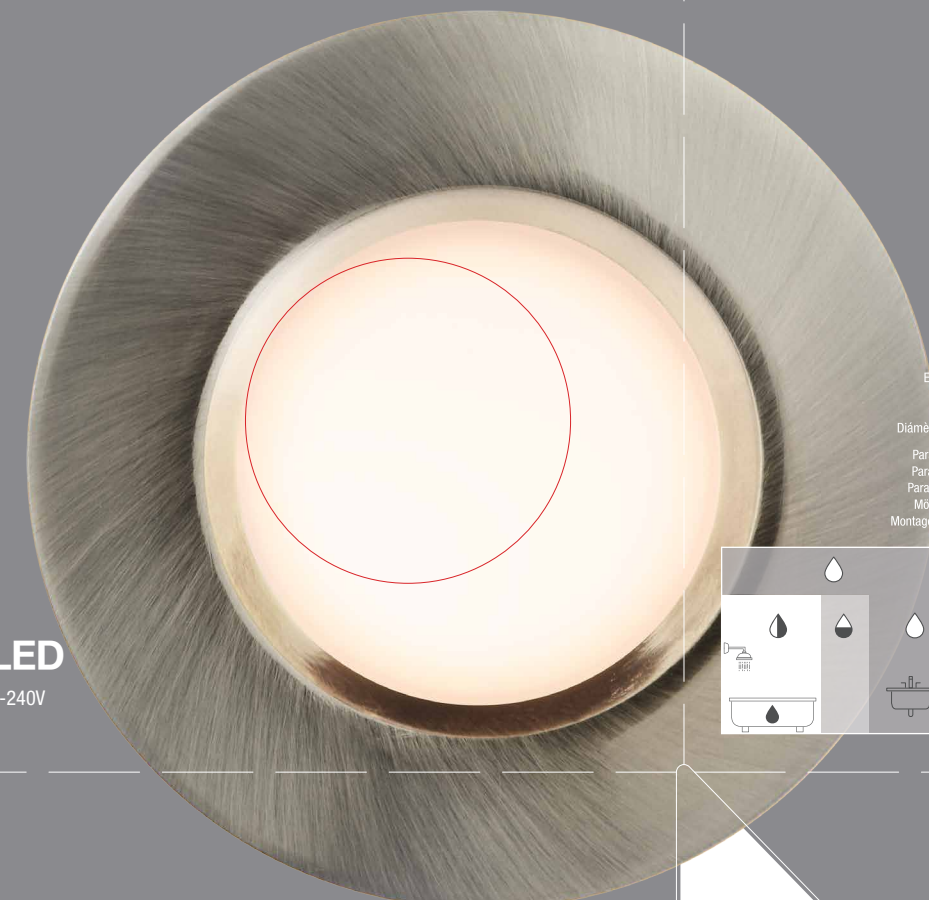

nordlux®

MOODMAKER®



With memory function



Høddiameter 72mm
Einbaudiameter 72mm
Hølediameter 72mm
Håldiameter 72mm
Diameter de perçage 72mm

Parallellforbindelse muligt
Parallelschaltung möglich
Möjligt att parallelkoppla
Montage en parallèle possible

