


TIAKI | DOWNLIGHT | NICKEL

49570155

nordlux®

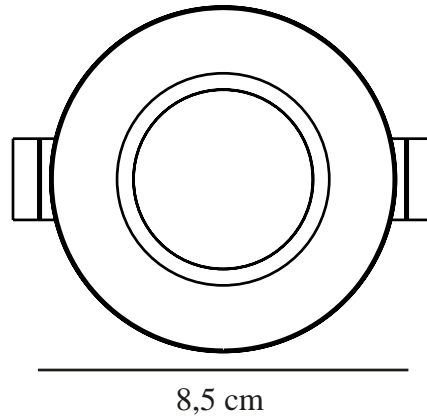

Voltage (V): 230 Volt
IP degree: IP65
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Socket type: LED Module
Parallel connection: True

Primary material: Plastic
Secondary material: Metal
Colour: Nickel

Height (cm): 4.5
Built In Spot Diameter (cm): 8.5
Mount directly into insulation:
False


EAN: 5701581474888
TUN: 2049775
Item Number: 49570155
Pcs Per Master Carton: 3

Sales Box Height (cm): 13
Sales Box Width(cm): 13
Sales Box Depth (cm): 6.5
Sales Box Volume m³ : 0.0011
Product net weight (kg): 0.15

Brightness of light (Lumen): 345
Colour temperature (Kelvin):
2700/4000
Ra-value : 80
Lifetime (hours): 20000
Beam angle (°) : 100
Candela (cd) (for directional
lamp only): 150
Energy class: F
Actual watt (W): 6.5

- 2-step Moodmaker™ dimming (2700/4000 kelvin) by your regular wall switch • Suitable for humid areas (IP65) • Parallel connection possible
- Connector block included • 5-year LED guarantee

TIAKI is a round downlight with integrated LED, allowing for parallel connection. TIAKI has Moodmaker™ functionality, which makes it possible to dim the light in two steps without the use of a dimmer, simply using a standard electrical outlet, while the downlight automatically remembers the last light setting as well. TIAKI allows you to switch between 600lm at 4000K and 345 lm at 2700K. The downlight even meets protection class IP65, which makes it usable in humid environments.

 **ENERG**

Nordlux
49570155

A

B

C

D


E

F

G

F

7
kWh/1000h



2019/2015