



LEONIS 3-KIT IP23 | DOWNLIGHT/RECESSED | WHITE

50250101

nordlux®

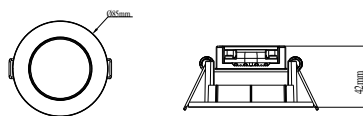

Cutout: 68-76mm

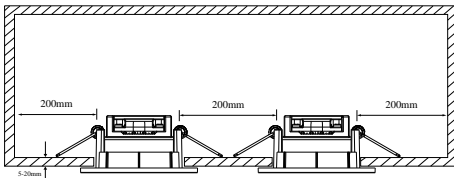

Voltage (V): 230 Volt

IP degree if the fixture includes

two types of IP degree: IP23

Class (Class I, Class II, Class III):

Class 2 (Double isolated)

Lampholder type (eg, E27/E14,

etc): LED Module

Dimmerable: True

Parallel connection possible?:

True

Primary material: Plastic

Color: White

Built In Spot Diamter (cm): 8.5

EAN: 5701581489080

TUN: 2056376

Item Number: 50250101

Pcs Per Master Carton: 3

Sales Box Height (cm): 13

Sales Box Width(cm): 13

Sales Box Depth (cm): 9

Sales Box Volume m³ : 0.0015

Net weight of the luminaire (kg):
0.073

Useful Lumen (lm): 345

Color Temperature (K): 2700

Ra-value : 80

Lifetime (h): 20000

Spread Angle (°) (beam angle of
luminaire): 110

Candela (cd) (for directional
lamp only): 0

Energy Class: G

Leonis is a single downlight with a low installation height. The downlight has an integrated LED and a frame in white plastic which contributes to a long life and low energy consumption. Furthermore, the downlight has opal white diffuser glass, that allows light to spread beautifully throughout the room. It is quick and easy to install Leonis via a screwless plug-in connection and twist-lock system. In addition, the downlight has a flexible cutting diameter (Ø68-73/76mm) and allows for parallel connection.