



LEONIS 3-KIT IP65 | DOWNLIGHT/RECESSED | NICKEL

50260155

nordlux®

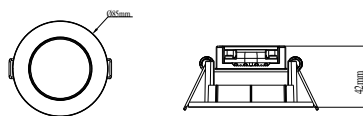

Cutout: 68-76mm

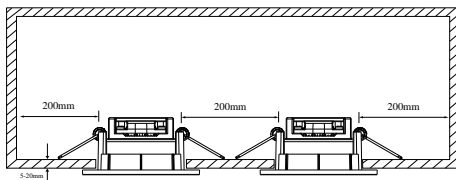

Voltage (V): 230 Volt

IP degree if the fixture includes

two types of IP degree: IP65

Class (Class I, Class II, Class III):

Class 2 (Double isolated)

Lampholder type (eg, E27/E14,

etc): LED Module

Dimmerable: True

Parallel connection possible?:

True

Primary material: Plastic

Color: Nickel

Built In Spot Diameter (cm): 8.5

EAN: 5701581488984

TUN: 2056379

Item Number: 50260155

Pcs Per Master Carton: 3

Sales Box Height (cm): 13

Sales Box Width(cm): 13

Sales Box Depth (cm): 9

Sales Box Volume m³ : 0.0015

Net weight of the luminaire (kg):
0.073

Useful Lumen (lm): 345

Color Temperature (K): 2700

Ra-value : 80

Lifetime (h): 20000

Spread Angle (°) (beam angle of
luminaire): 110

Candela (cd) (for directional
lamp only): 0

Energy Class: G

- Parallel connection possible
- Ideally suited for bathroom zone 1-2 IP65
- Integrated connector block

Leonis is a single downlight with a low installation height. The downlight has an integrated LED and a frame in white plastic which contributes to a long life and low energy consumption. Furthermore, the downlight has opal white diffuser glass, that allows light to spread beautifully throughout the room. It is quick and easy to install Leonis via a screwless plug-in connection and twist-lock system. In addition, the downlight has a flexible cutting diameter (Ø68-73/76mm) and allows for parallel connection.