47x17,5x16,5

nordlux®
RAY
Dessin: 63201003
Db: 1850679
Sort/Schwarz
Black/Svart
Noir

nordlux®
RAY
designed in Denmark by
nordlux®
Suitable for Indoor use
Features
M

nordlux®
RAY
designed in Denmark by
nordlux®
Suitable for Indoor use
Features
M

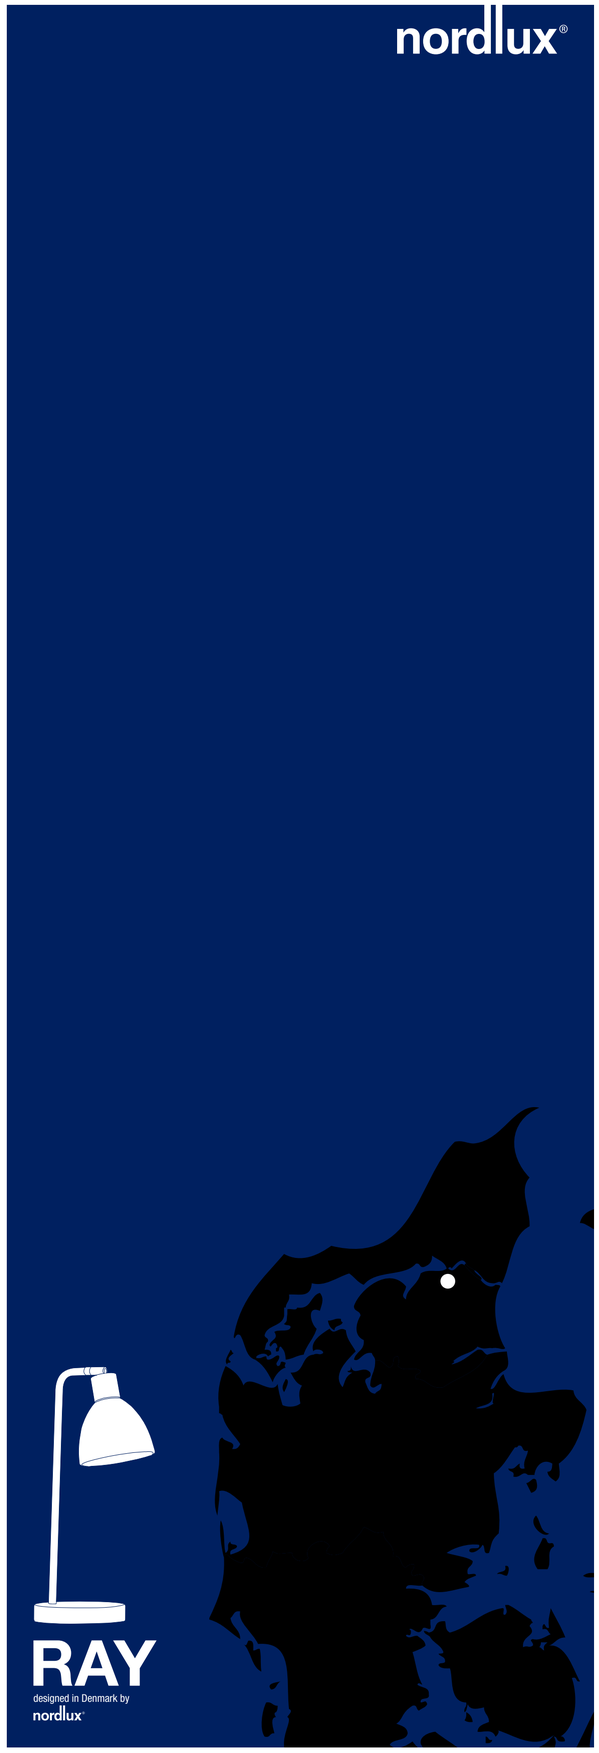
nordlux®
RAY
designed in Denmark by
nordlux®

nordlux®
40cm
12cm
15cm
RAY
Dessin: 63201003
Db: 1850679
Sort/Schwarz
Black/Svart
Noir
IP20
Dobbelt isoleret (kl. 2)
Doppelte isolierung
Double insulation
Dubbel isolering
Double protection
E14
M
Metal
Metal
Metal
Metall
Métal
MAX 40W
Indoor
Egnet til indendørs brug
Geeignet für Innen
Suitable for Indoor
Lämplig att användas inomhus
Indiqué pour usage intérieur
230V
Ledningslængde: 180 cm
Kabellänge: 180 cm
Cord lenght: 180 cm
Sladd längd: 180 cm
Longueur de câble: 180 cm
Afbryder
Schalter
Switch
Strömbrytare
Interrupteurtt
CE
nordlux® 63201003
This luminaire is compatible with bulbs of the energy classes:
A++
A+
A
B
C
D
E
874/2012
QR CODE
As a leading Scandinavian lighting supplier we are naturally committed to shouldering our part of the responsibility for solving national and global challenges. We do this under the heading 'A Brighter World'.
www.nordlux.com
Nordlux A/S · Kartskogsvej 8 · DK-9200 Aalborg SV
5 701581 344983