


nordlux®



RAY

Dessin: 63224003

Dt: 1850677

Sort/Schwarz

Black/Swart

Noir

nordlux®



RAY

by nordlux

Suitable for indoor use

Features

M

nordlux®



RAY


by nordlux

Suitable for indoor use

Features

M

nordlux®

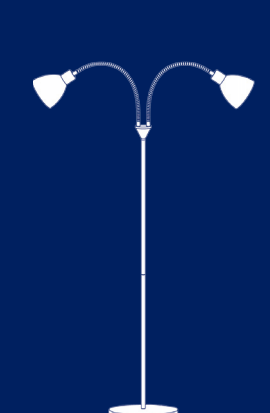


RAY

by nordlux



nordlux®

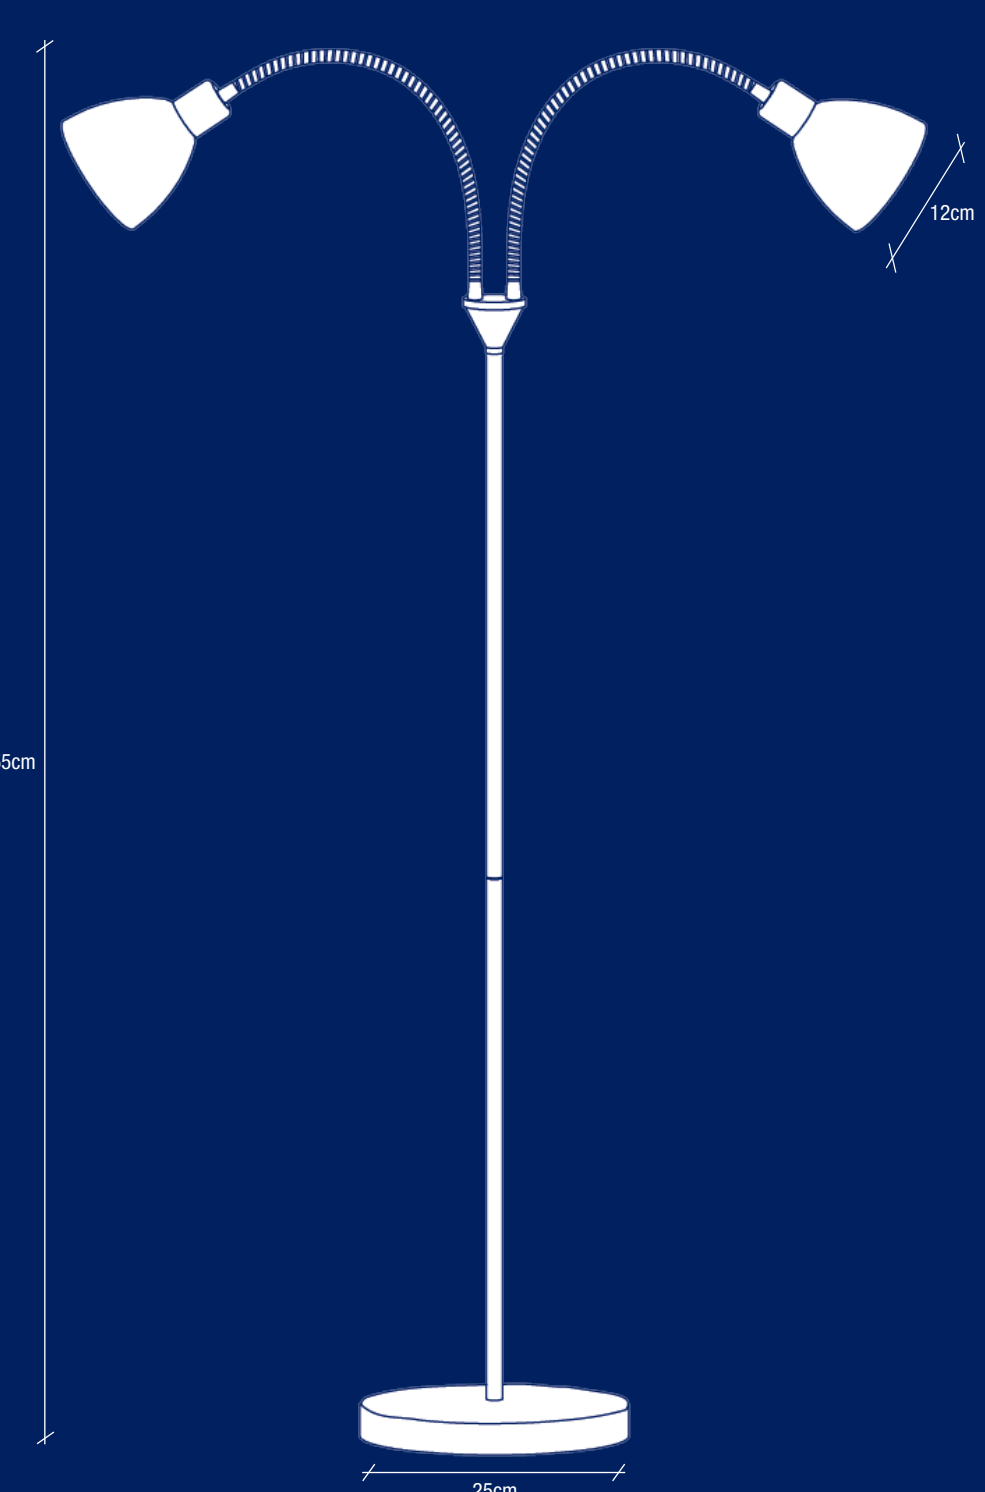

155cm

25cm

RAY

Dessin: 63224003

Dt: 1850677

Sort/Schwarz

Black/Swart

Noir

IP20



Doppelt isoliert d.h. 2.

Doppelte Isolierung

Double insulation

Dubbel isolering

Double protection

E14



Metall

Metall

Metall

Metall

MAX 2x40W



Gründel inwendige brug

Designed for knot

Suitable for knot

Lamply till at användas inomhus

Adapté pour usage intérieur

230V



Ledningslängd: 180 cm

Kabel längd: 180 cm

Cord length: 180 cm

Kabel längd: 180 cm

Longueur du câble: 180 cm





Funkbrytare

Funkbrytare

For dimmeryture

Interrupteur à pied



As a leading Scandinavian lighting supplier we are naturally committed to sustainable development and the responsibility for solving environmental and global challenges. We do this under the heading "A Brighter World."



QR CODE

As a leading Scandinavian lighting supplier we are naturally committed to sustainable development and the responsibility for solving environmental and global challenges. We do this under the heading "A Brighter World."

nordlux® 63224003



This luminaire is compatible with bulbs of the energy classes:

A++

A+

A

B

C

D

E

874/2012

www.nordlux.com

Revised A12, Fotomängd 1, 18.03.2012, Autarky 10



5 701381 343168