

90x95x195mm

MIXIT PRO



Item N°: 71810132
 Db: 1703668
 Borstet Stål / Gebürsteter Stahl / Brushed Steel
 Borstat Stål / Acier Brossé / Geborsteld staal

Light source LED GU10 (Not incl.)
 IP class IP23
 Tilt Angle 30°
 Class Class II
 Material Plastic/Metal

www.nordlux.com
 Nordlux AS · Bittre Havnegade 34 · DK-9000 Aalborg



Cut-out ø 76mm

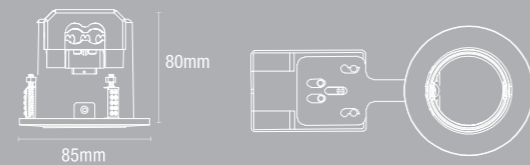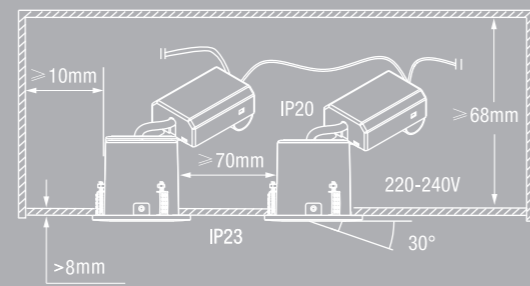

nordlux®

nordlux®

- LED Max 8W
- Double insulation
- Parallel arrangement possible
- Tilt angle 30°
- CE
- UKCA
- Parallel connection possible

Doppelt isoleret (d II)
 Doppelte Isolierung
 Double insulation
 Double isolering
 Double protection
 Dubbele isolatie

Parallelforbindelse muligt
 Parallelanordnung möglich
 Parallel arrangement possible
 Mögigt til parallelforbindelse
 Montage en parallèle possible
 Parallel aansluiten mogelijk

Kipningsgrad: 30°
 Schwenkbar bis: 30°
 Angle of tilt: 30°
 Lampans vridningsgrad: 30°
 Degel de devancement: 30°
 Kantschuiver: 30°

Indiameter 76mm
 Einbaudiameter 76mm
 Høje diameter 76mm
 Hølediameter 76mm
 Diameter de perçage 76mm
 Zaag maat 76mm

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
9 x 19.5 x 9.5	0.06
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.23	0.0017

- CAN BE MOUNTED DIRECTLY IN INSULATION
- TILT ANGLE 30°
- PARALLEL CONNECTION

MIXIT PRO

- CAN BE MOUNTED DIRECTLY IN INSULATION
- TILT ANGLE 30°
- PARALLEL CONNECTION

nordlux®
1-KIT




nordlux®



1-KIT

nordlux®

Easy installation in all ceilings

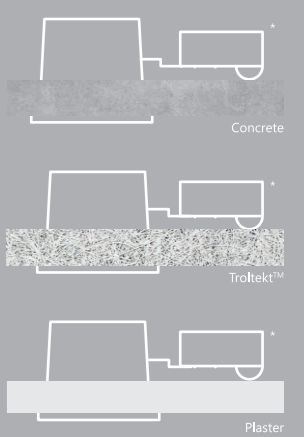

*Connector box can be moved

AAD: 30122025 ST

Nordlux UK
 Unit 22, Deanfield Court
 BB7 1QS Clitheroe Lancashire
 01200422777