


要求：
材质：250G灰卡对裱哑膜
印刷：四色印刷+ PANTONE2767C
规格：按文件尺寸

178mm

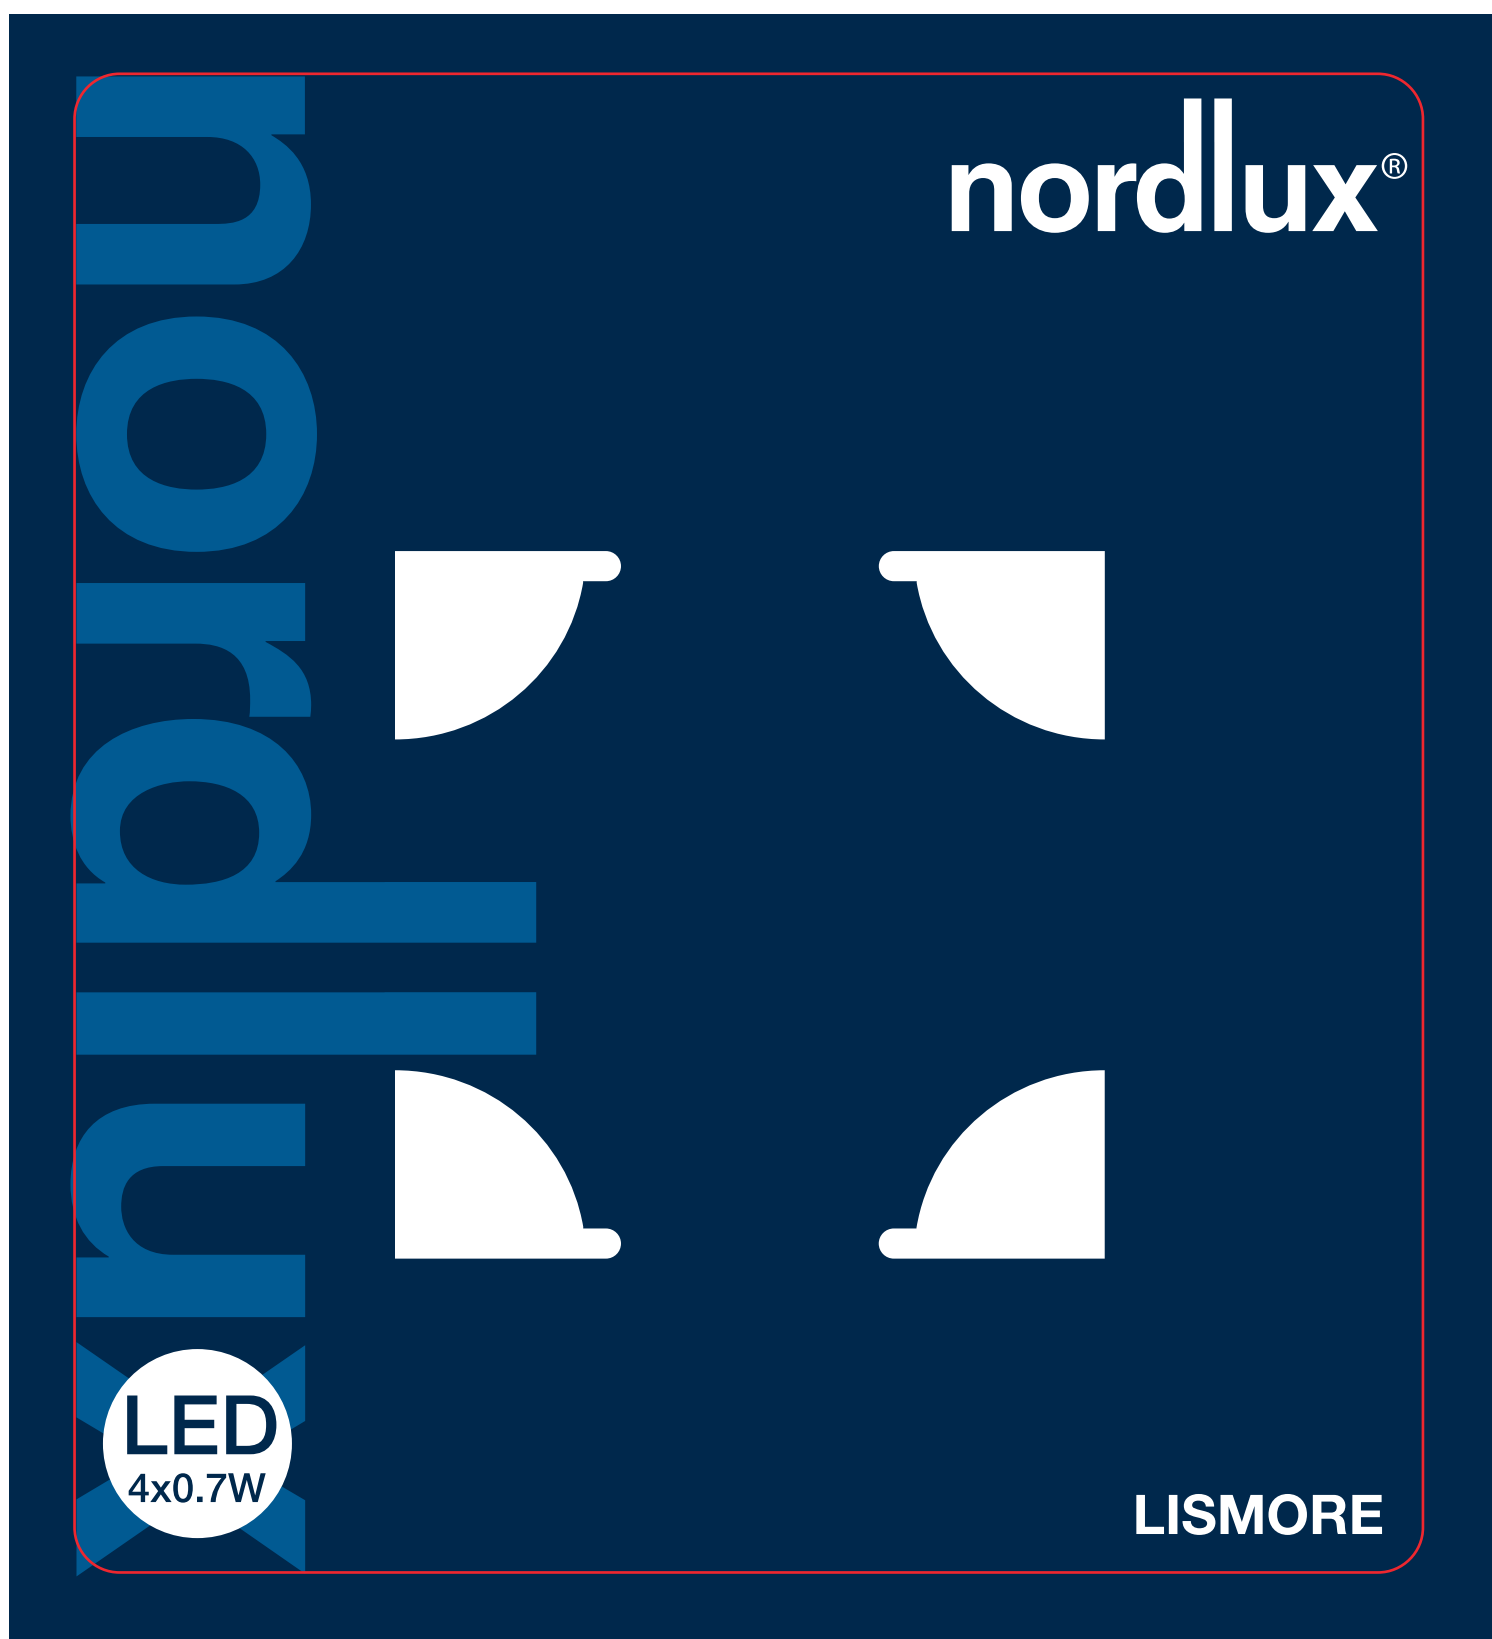

197mm

正面

要求：

材质：250G 灰卡对裱哑膜

印刷：四色印刷+ PANTONE2767C

规格：按文件尺寸

178mm

LISMORE
Dessin: 76730001
Db: 1543943

nordlux®

IP20 CE 

LED 230V 

DRIVER Dobbelt isoleret (kl. 2)
Doppelte Isolierung
Double insulation
Dubbel isolering
Double protection
Dubbele isolatie

SPOT Klasse 3
Schutzklasse 3
Class 3
Klasse (3)
Classe 3
Klasse 3

P Plast
Kunststoff
Plastic material
Plastik
Plastique
Plastic materiaal

Indoor Eignet til indendørs brug
Geeignet für Innen
Suitable for Indoor
Lämplig att användas inomhus
Indiqué pour usage intérieur
Geschikt voor binnen

 Ledningslængde: 150 cm
Kabellänge: 150 cm
Cord length: 150 cm
Sladd längd: 150 cm
Loungeur de câble: 150 cm
Snoerlengte: 150 cm

 Incl. 4x0.7W driver
Mit 4x0.7W Driver
Incl. 4x0.7W driver
Incl. 4x0.7W driver
Avec 4x0.7W driver inclus
Incl. 4x0.7W driver

 Afbryder
Schalter
Switch
Strömbrytare
Interrupteur
Schakelaar

 120°

PLEASE NOTE
LED MODULE IS
FIXED IN LAMP

LED 4x0.7W 95%^①
warm up
< 1 sec
Light up:
< 1 sec

~~Hg~~ ~~MERCURY~~ 

 12500
ON/OFF  3000
KELVIN

 www.nordlux.com/safedisp/dk
www.nordlux.com/safedisp/de
www.nordlux.com/safedisp/uk
www.nordlux.com/safedisp/se
www.nordlux.com/safedisp/fr
www.nordlux.com/safedisp/nl

**4x75
LUMEN**

 30000
HOURS **Ra
80**


AAD: 18032020
www.nordlux.com
Nordlux A/S - Østre Havnegade 34 - DK-9000 Aalborg


5 701581 210684

197mm

反面

要求：
材质：250G灰卡对裱哑膜
印刷：四色印刷+ PANTONE2767C
规格：按文件尺寸

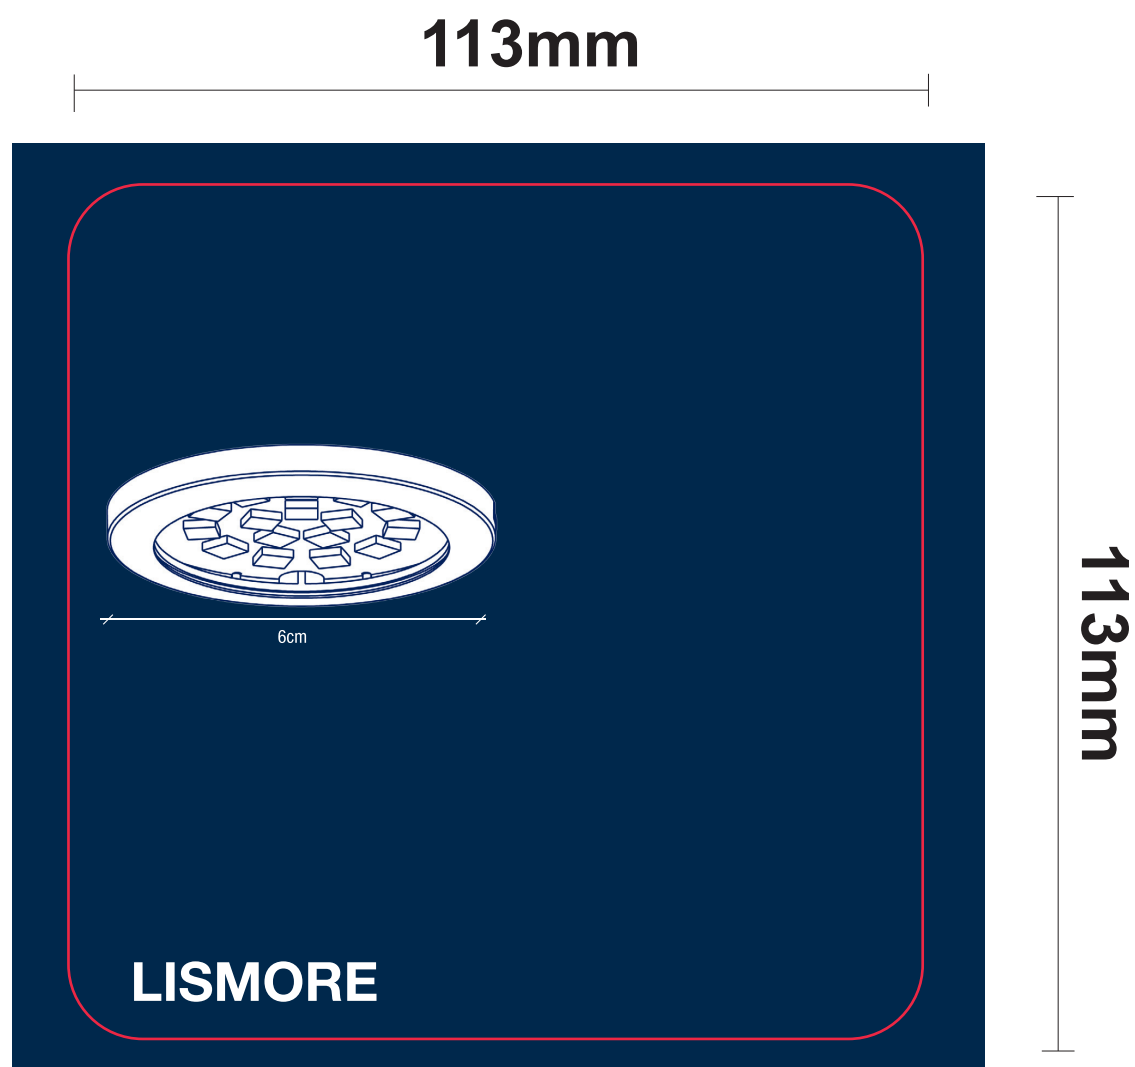

单面