

要求：


材质：250G灰卡对裱哑膜

印刷：四色印刷+ PANTONE2767C

规格：按文件尺寸

尺寸:178x197mm

250g灰卡对裱覆哑膜

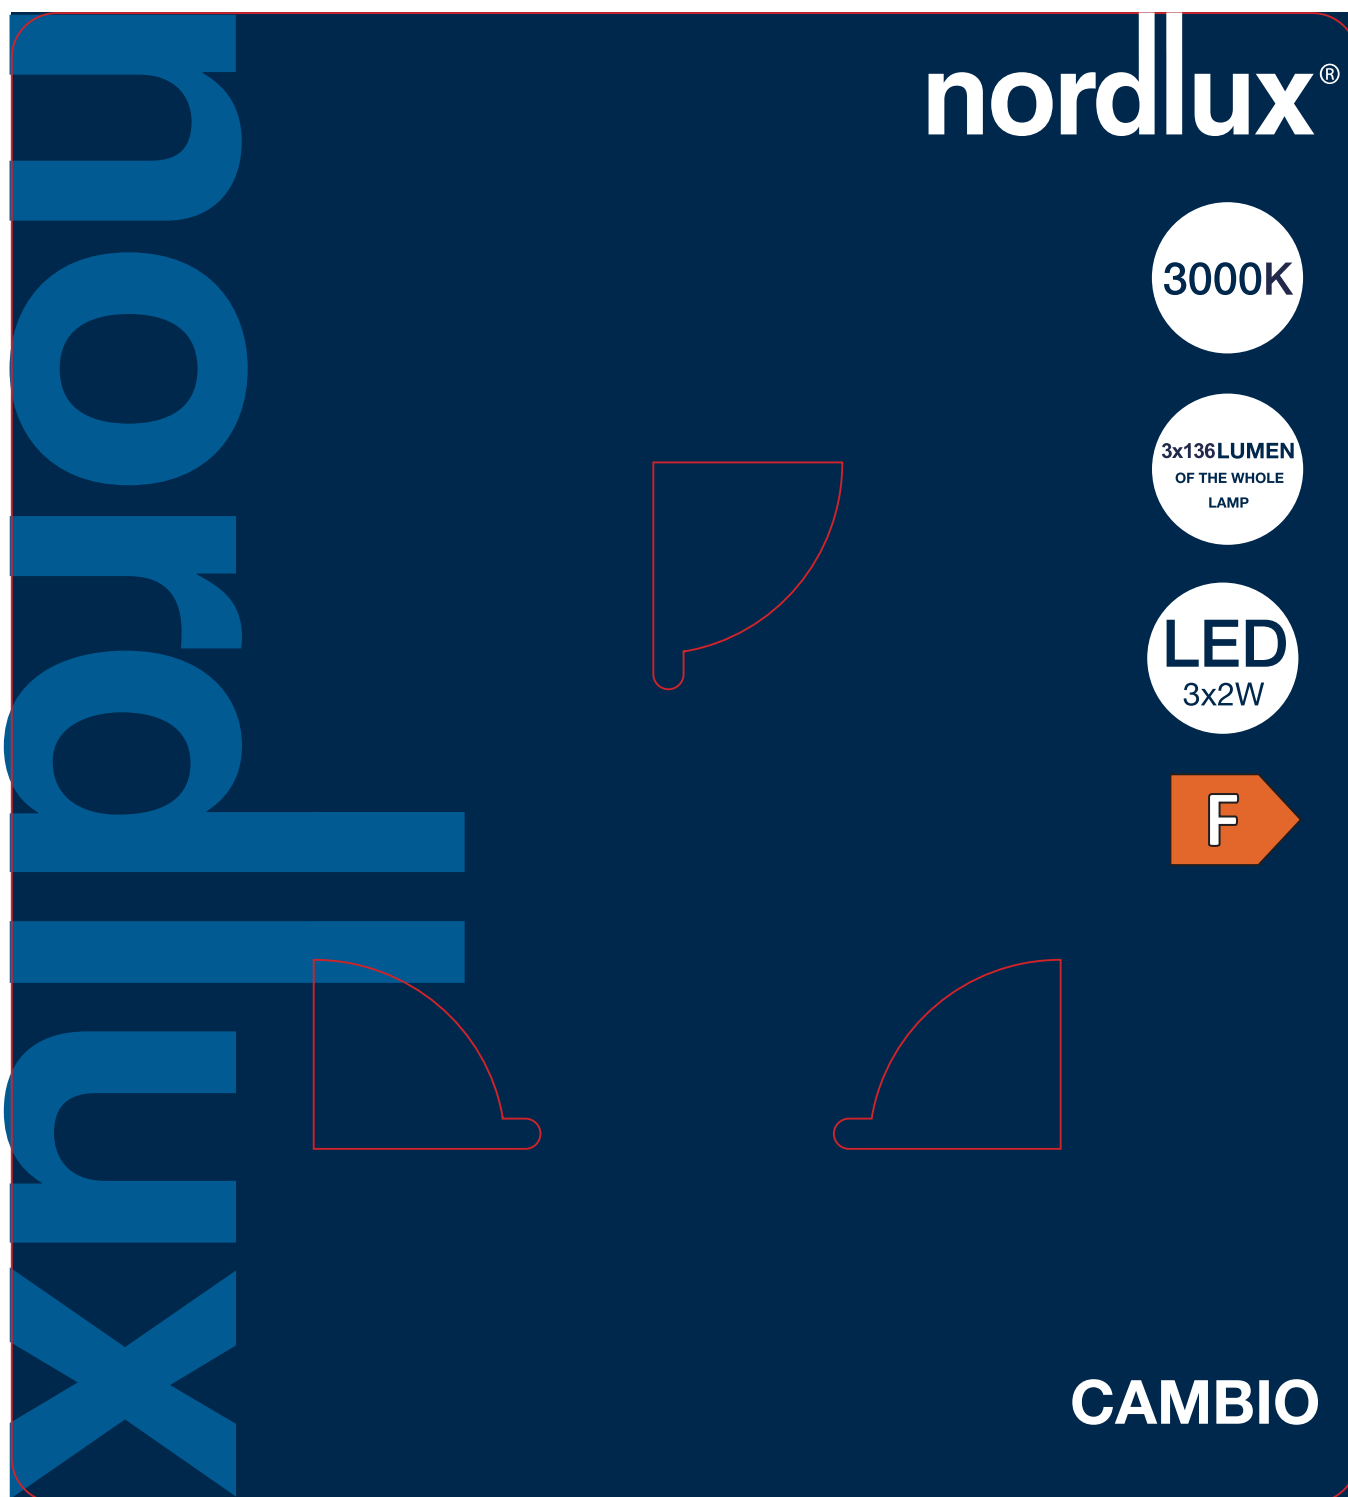

正面

要求：
 材质：250G 灰卡对裱哑膜
 印刷：四色印刷+ PANTONE2767C
 规格：按文件尺寸

尺寸:178x197mm
 250g灰卡对裱覆哑膜

CAMBIO

Item N°: 79440029
 Db: 1850682
 Aluminium / Aluminium

nordlux®

IP20	SPOT 	IP23 	Klasse III Schutzklasse III Class III Klass (III) Classe III Klasse III
LED		P	Dobbelt isoleret (K II) Doppelte Isolierung Double insulation Dubbel isolering Double protection Dubbele isolatie
220-240V ~50/60Hz			Eignet til indendørs brug Geeignet für Innen Suitable for Indoor Lämpig att användas inomhus Indiqué pour usage intérieur Geschikt voor binnen
			Indbygningshøjde: Min 3 cm Einbautiefe: Min 3 cm Mounting depth: Min 3 cm Monteringsdjup: Min 3 cm Profondeur de montage: Min 3 cm Inbouwdiepte: Min. 3 cm
DRIVER 	Zone 3		Velegnet til badeværelse: Zone 3 Geeignet für Badezimmer: Zone 3 Suitable for bathroom: Zone 3 Lämpig till att användas i badrum: Zon 3 Indiqué pour usage et salle de bains: Zone 3 Geschikt voor badkamer: Zone 3
SPOT 	Zone 3		Velegnet til badeværelse: Zone 3 Geeignet für Badezimmer: Zone 3 Suitable for bathroom: Zone 3 Lämpig till att användas i badrum: Zon 3 Indiqué pour usage et salle de bains: Zone 3 Geschikt voor badkamer: Zone 3
			Ledningslængde: 180 cm Kabellänge: 180 cm Cord length: 180 cm Slädd längd: 180 cm Longueur de câble: 180 cm Snoerlengte: 180 cm
			Switch on cable Afbryder på ledning Schalter am Kabel Omkopplare på kabeln Interrupteur sur le câble Schakelaar op kabel
			Huldiameter 68–75mm Einbaudiameter 68–75mm Hole diameter 68–75mm Håldiameter 68–75mm Diamètre de perçage 68–75mm Zaag maat 68–75mm

Zone 2+3

Velegnet til badeværelse: Zone 2+3
 Geeignet für Badezimmer: Zone 2+3
 Suitable for bathroom: Zone 2+3
 Lämpig till att användas i badrum: Zon 2+3
 Indiqué pour usage et salle de bains: Zone 2+3
 Geschikt voor gebruik in de badkamer in zone 2 + 3

149 Cd

3000 KELVIN

LED 3x2W

8W SPOT & DRIVER

3x136 LUMEN
OF THE WHOLE LAMP

3x200 LUMEN
OF LIGHT SOURCE
(360°)

20000 HOURS

Ra 80

CE

UK CA

www.nordlux.com
 Nordlux A/S · Østre Havnegade 34 · DK-9000 Aalborg

FR
 ÉLÉMENTS D'EMBALLAGE

FR
 Cet appareil et ses accessoires se recyclent

À DÉPOSER EN MAGASIN OU À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairede mesdechets.fr
 Privilégiez la réparation ou le don de votre appareil !

* If you want to install this light fixture in your bathroom and knowing some countries have extra local installation/safety requirements, always contact your local electrician before installation (eg. France)!

5 701581 341784

反面

要求：
材质：250G灰卡对裱哑膜
印刷：四色印刷+ PANTONE2767C
规格：按文件尺寸

尺寸:135x135mm
250g灰卡对裱覆哑膜

The image shows a product label for Nordlux LED light bulbs. On the left, there are technical diagrams: a top view of a bulb with dimensions $\phi 65$ and $\phi 45$, a side view of the bulb base with dimensions 9.3, 6.4, and 11, and a vertical view of the bulb with a length of 180cm. The label itself is dark blue with white text and features the Nordlux logo at the top right. Below the logo, there are two energy efficiency labels: one for the UK (ENERGY 2) and one for the EU (ENERGY 2), both with a rating of 'F'. The label also includes a QR code and the text '2 kWh/1000h'. At the bottom, there is the 'CAMBIO' logo and contact information for Nordlux UK: AAD: 28042023 XY, Unit 22, Deanfield Court, BB7 1QS Clitheroe Lancashire, 01200422777.

单面