



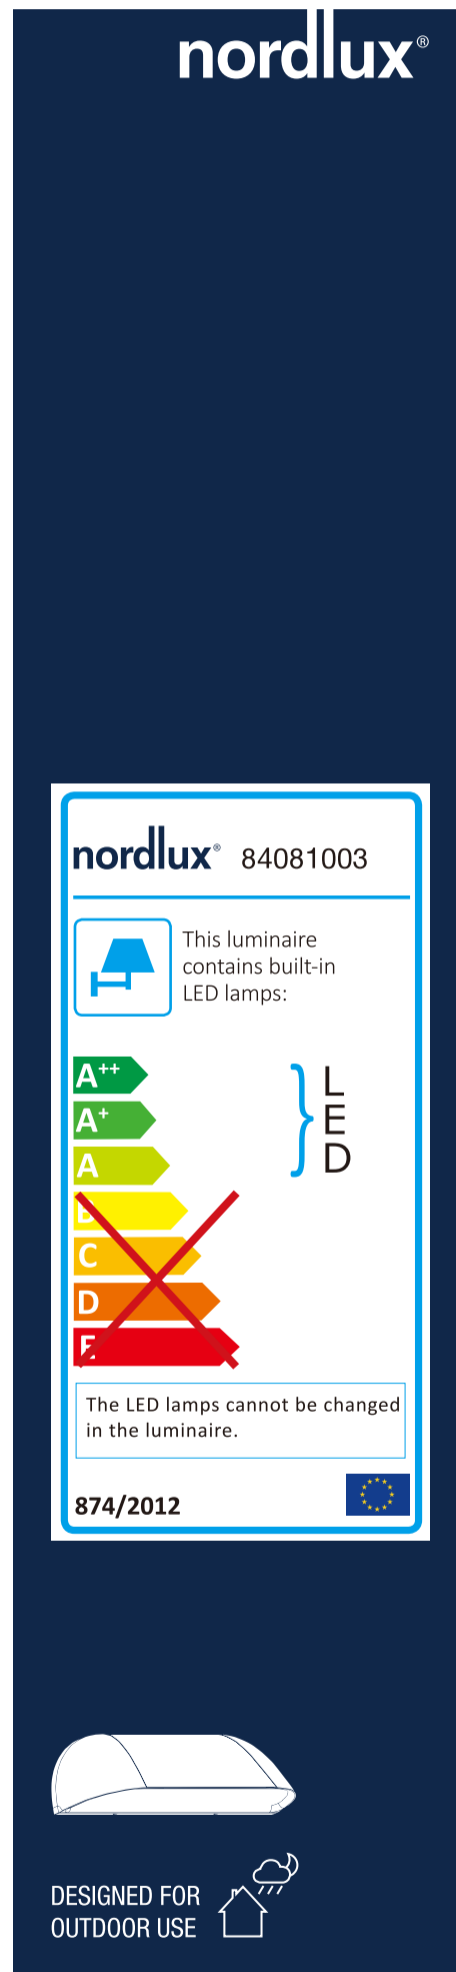

75x70x270mm

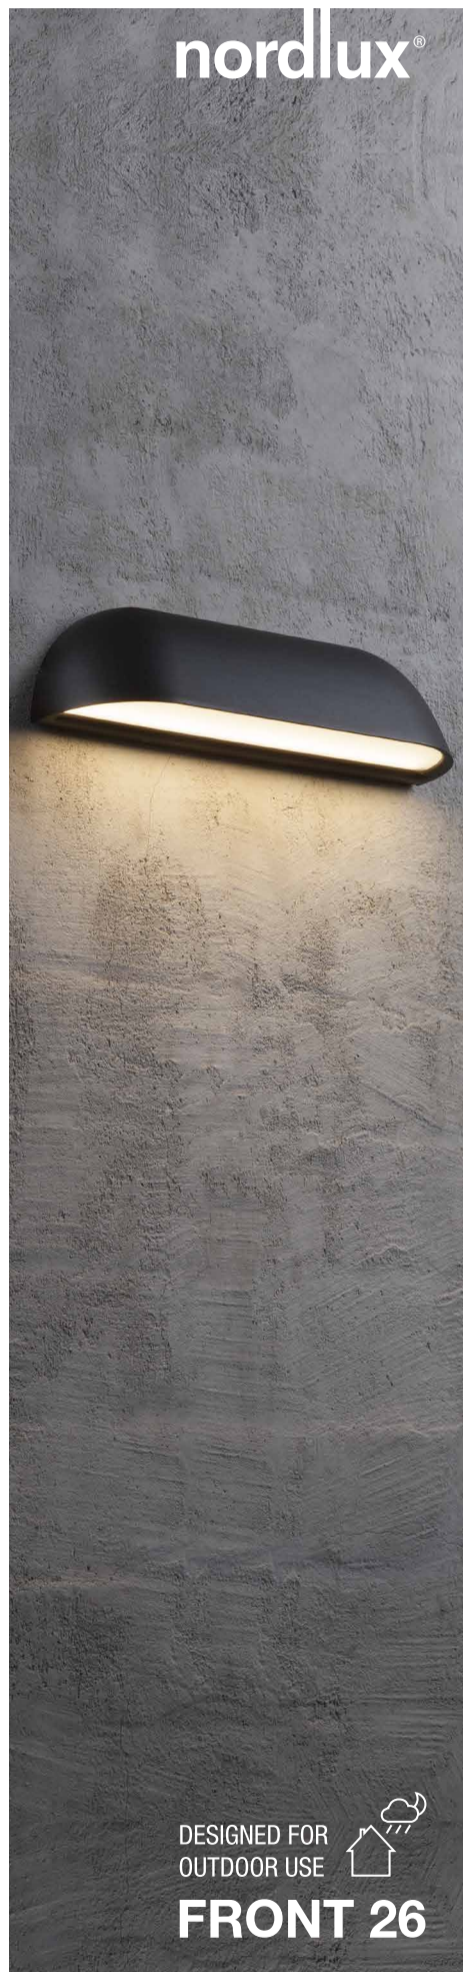

nordlux®

IP44		Fremspring 6,8 cm Ausladung 6,8 cm Projektion 6,8 cm Projektion 6,8 cm Saille 6,8 cm
230V		Klasse 1 (jord) Geerdet Earth Contact Jordkontakt (1) Prise de terre (classe 1)
LED	M/P	Metal/Plast Metall/Kunststoff Metal/Plastic material Metall/Plastik Métal/Plastique
		Egnet til udendørs brug Geeignet für Außen Suitable for outdoor Lämplig för utomhusbruk Indiqué pour usage extérieur
		Parallelforbindelse muligt Parallelschaltung möglich Parallel arrangement possible Möjligt att parallekoppla Montage en parallèle possible

! Danmark skal udendørs lamper monteres af en autoriseret elinstallatør.
In Denmark, outdoor lightings must be mounted by an authorized electrician.
In Danmark muss Aussenleuchten von einem autorisierten Elektriker installiert werden.
In Denmark shall outdoor lamps be mounted by an authorized electrician.
Au Danemark les lampes pour usage extérieur doivent être montées par un installateur-électricien autorisé.

LED 8W		25000 HOURS	95% warm up < 2 sec Light up: < 0,5 sec
3000 KELVIN	650 LUMEN		
12500 ON/OFF			
Ra 80			Hg MERCURY
	www.nordlux.com/safedis/dk www.nordlux.com/safedis/de www.nordlux.com/safedis/uk www.nordlux.com/safedis/se www.nordlux.com/safedis/fr		

www.nordlux.com
Nordlux A/S - Østre Havnegade 34 - DK-8000 Ålborg

5 701581 341289

AAD:25102019 XY

Height x Width x Depth COLOR BOX (CM)	NET WEIGHT COLOR BOX (KG)
7.5x7x27	0.04
GROSS WEIGHT COLOR BOX (KG)	VOLUME COLOR BOX (CBM)
0.42	0.002